


CYCLOPS

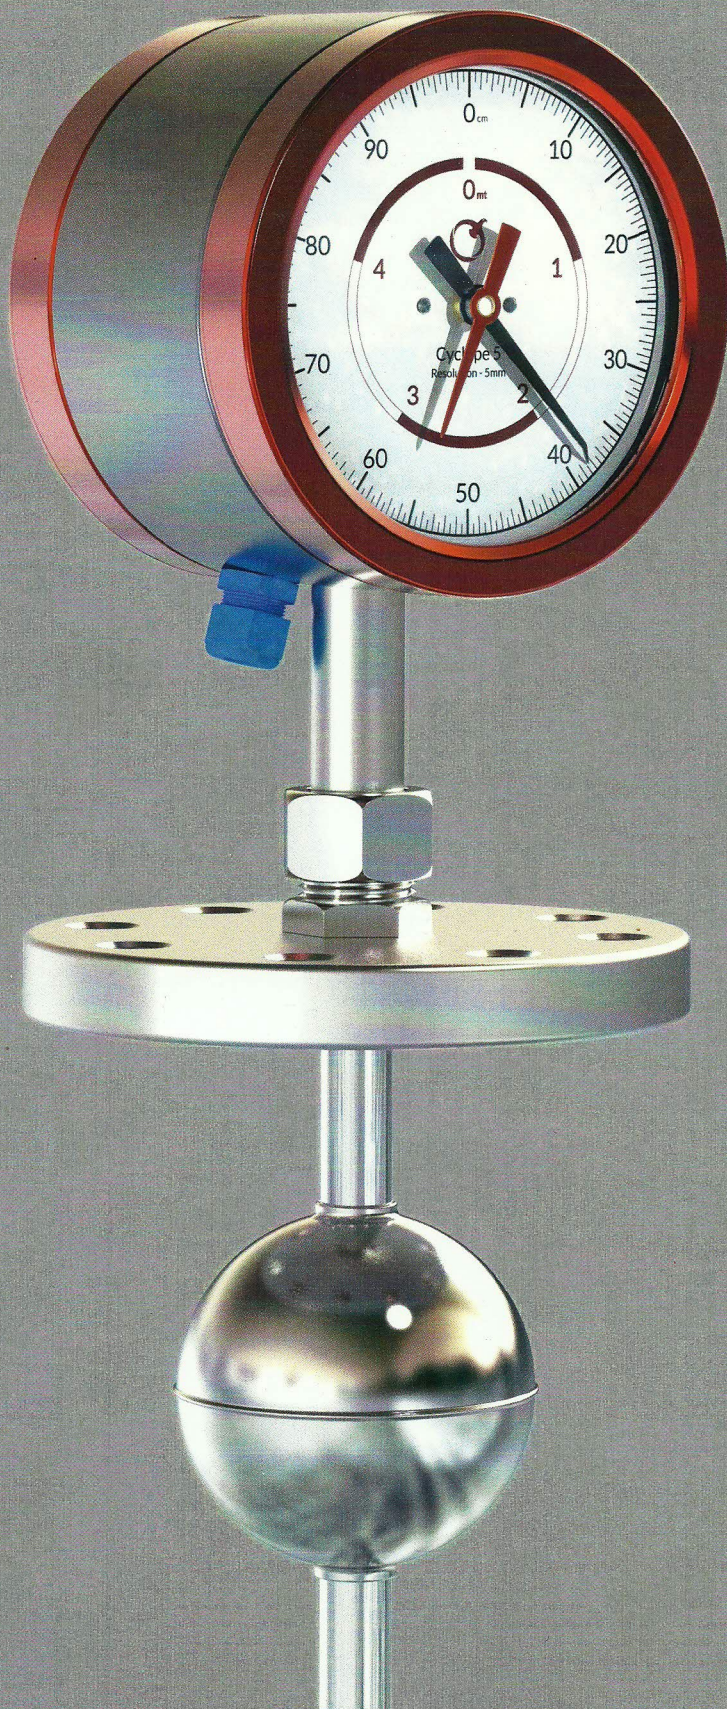

CLOCKWORK DIAL LEVEL INDICATOR

- For underground and above ground tanks
- Power supply not required
- Remote communication
- ATEX Compliance

APPLICATIONS

- LPG tanks
- Large fuel stock management
- Petrochemical plants
- Solvents depots
- Water distribution and treatment plants
- Industrial applications

MODELS

- CYCLOPS 03 measuring range up to 3 m. resolution 10 mm
- CYCLOPS 05 measuring range up to 5 m. resolution 2,5 mm
- CYCLOPS 25 measuring range up to 25 m. resolution 2,5 mm

TECHNICAL FEATURES

- INDICATOR / TRANSMITTER / SWITCH
- IP65 aluminium case
- Wide range of S. S. and resins floats
- Tank connections: threaded, flanged
- Stainless steel pipe 20 /40 mm. or flexible corrugated pipe or flexible SS cable
- Accuracy $\pm 2,5$ mm
- Repeatability ± 1 mm.

OUTPUTS

- Analog 4-20 mA two wire / Smart Hart
- Serial port RS 485 Modbus, communication interface protocol to the main station management systems
- Digital outputs up to 4 mechanical switches standard and Exd versions, intrinsically safe Namur proximity, adjustable set points

ON REQUEST

- Dial with % reading
- Remote head on the bottom of the tank
- Customized flanges and materials

